



MEGA



**General
catalogue**

Safety elements



Safety overload valve.
It prevents the jack from exceeding its nominal capacity.



Hydraulic stroke limiter.
Hydraulic limit switch that limits excess piston travel in order to prevent its damage.



Operation by the "Deadman" principle
(stops operation if the user loses control accidentally).



Lowering Control System Device (LCS).
It acts automatically providing a smooth, even and safe descent of the load, in any circumstances, even if it is due to a sudden and/or accidental opening of the discharge.



Automatic spring return piston.



Manometer.



Extendable screw for fast and precise approach.

"The bitterness of poor quality remains long after the sweetness of low price is forgotten"

Benjamin Franklin



Visit the corporate video
on our Youtube channel



Presentation

At **Melchor Gabilondo, S.A.** we have been manufacturing hydraulic lifting equipment and tools for garages, workshops and industry since 1940 with the clear aim of exceeding the expectations of our business partners.

“Millions of hydraulic devices manufactured in our facilities work every day around the world”

We are a company with vast experience in the market, constantly seeking to improve and to provide our users with the best working tools on the market.

MEGA products are used regularly in over 100 countries worldwide by professionals looking for tools and equipment that are passed down from generation to generation, from garage to garage, from site to site, with endless stories and experiences, mostly in the most adverse conditions, and our commitment remains the same: to make our products better every day.




At our premises located in Bériz since the 1960s, we have been carrying out the entire manufacturing process **in order to offer our customers the best quality and maximum service adaptability.**

As a sign of our commitment to innovation, we are one of the first companies to implement the *Lean Manufacturing* production system, eliminating all processes and stages that do not contribute to incorporating added value, providing the advantage of creating value where no one else does.

Our constant improvement is not limited to the design or use of **cutting-edge technologies and innovative production techniques in the manufacture of hydraulic lifting equipment, but is also committed mainly to secure safety, on features such as the deadman's system, LCS lowering control system, hydraulic piston stroke limiter and safety overload valve.**

We choose and use the best raw materials on the market for the production of our products, ensuring and guaranteeing maximum durability and resistance in the most unfavourable conditions of use.



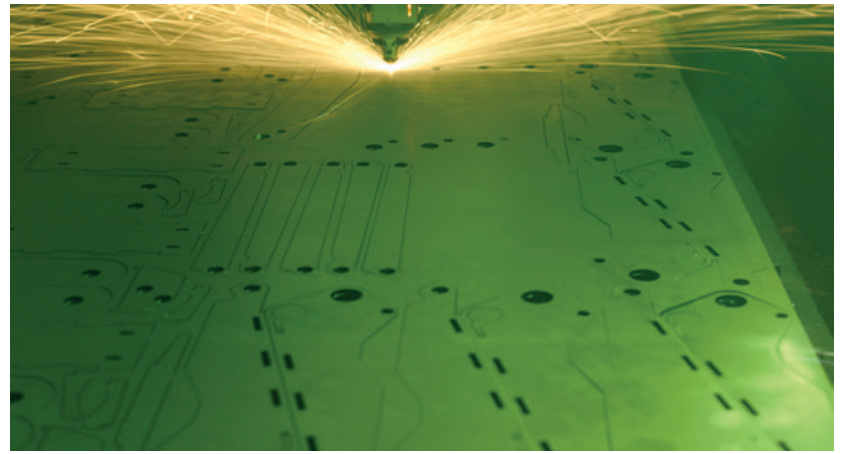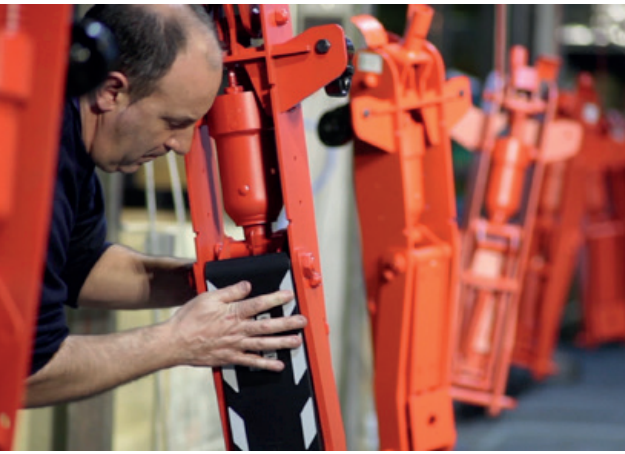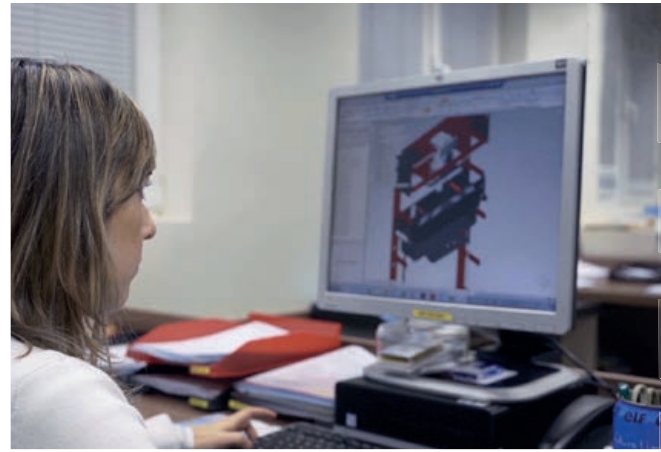

The brand

The prestige of a brand cannot be improvised

With more than 80 years of history, at **Melchor Gabilondo, S.A.**, we base our reputation on a tradition of quality, credibility and know-how, which is renewed every day, and enriched by generations of professionals committed to surpassing the high quality of our tools and guaranteeing a promising future for the MEGA brand.

International

Our equipment is a daily help in the most demanding workshops around the world. A strong commitment to service, a long and solid export history and a serious, transparent and carefully chosen distribution policy, are the keys that explain our recognition and international expansion.

Sector leader

We are committed to a sustained and controllable expansion, a balanced growth that does not compromise our quality or the exclusivity of our offer. **Faced with the temptation of diversification**, we are selective. We aim to collaborate with prestigious distributors who share our values and protect our reputation, in an exercise of mutual reinforcement and fair reciprocity.

Trolley jacks.....	6
Heavy duty trolley jacks.....	8
Air hydraulic jacks.....	10
Air hydraulic bottle jacks.....	12
Bottle jacks.....	14
Cranes.....	18
High lift transmission jacks.....	21
Presses.....	22
Jacking beams.....	28
Lifting tables.....	29
Pneumatic table for motorcycles.....	29
Wheel dolly.....	30
Transmission jack.....	30
Body repair kits.....	31
Body aligning set.....	32
Hydraulic pipe benders.....	33
Axle stands.....	33
Jack exhibitor.....	34
Index of references.....	35

Trolley jacks GT

New family of fully redesigned and improved GT trolley jacks

Main characteristics:

- **Safety system**, operation by the deadman's principle. Stopping the operation if the user accidentally loses control.
- **New metal pedal**. Equipped with a fast approach pedal, fewer pumps, reduces effort and time.
- **Wider width between the rear wheels**, providing greater load stability and easy jacking.
- **Reinforced structure**, double sheet welded in high resistance steel.
- **Bigger wheels**, offer better stability on uneven ground. Made of polyamide for a lower noise level.
- **Tool tray integrated in chassis**.
- **Oversized support platform** with rubber pad, offers greater contact with the load.



AVAILABLE
IN GREY



BUREAU
VERITAS

EN 1494



Safety overload valve.




LCS lowering control system.



Hydraulic stroke limiter.



Operation by "dead man's" principle.



Larger width between wheels.
High load stability.



Rubber pad included.



GT3 – 3t jack designed for lifting cars and vans.




Minimum height
95 mm.



GT4 – 4t jack specially designed for lifting commercial vehicles, SUVs and off-road vehicles.



Minimum height
140 mm.





GT2S – 2t jack equipped with mechanical lowering lock. Exclusive safety system that prevents the accidental lowering of the load by locking it at 320mm from the floor. Yellow pedal for unlocking the system.



Minimum height
95 mm.



EXTRA LOW PROFILE


Minimum height
70 mm.

GT2X – Ultra Low-profile jack, specially designed for lifting sport vehicles or reduced height.

GT2 – 2t jack designed for lifting cars and vans.



Minimum height
95 mm.

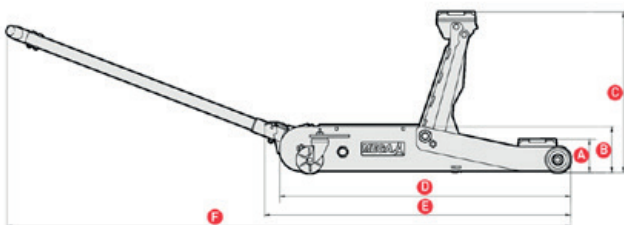

Capacity (t)	2	2	2	3	4
A	95	95	70	95	140
B	135	135	135	135	192
C	470	470	450	470	530
D	850	850	850	850	1075
E	900	900	900	900	1125
F	1610	1610	1640	1650	1910
G	360	360	360	360	360
H	257	257	253	257	260
Weight (kg)	35	37.5	39	36	48.5
References	GT2	GT2S	GT2X	GT3	GT4

Measurements in mm.

Heavy duty trolley jacks T

Suitable for all types of vehicles, from cars to industrial vehicles. Essential in truck fleets, bus company garages and agricultural machinery maintenance garages. The heaviest models have big wheels located in the centre of the chassis for better handling. Optimum use and distribution of material thanks to the rear side openings and front side reinforcements.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

EN 1494



T6 model handle.




T10

T6

Quick approach
to the load pedal



Handle of models T10, T12,
T15 and T20.

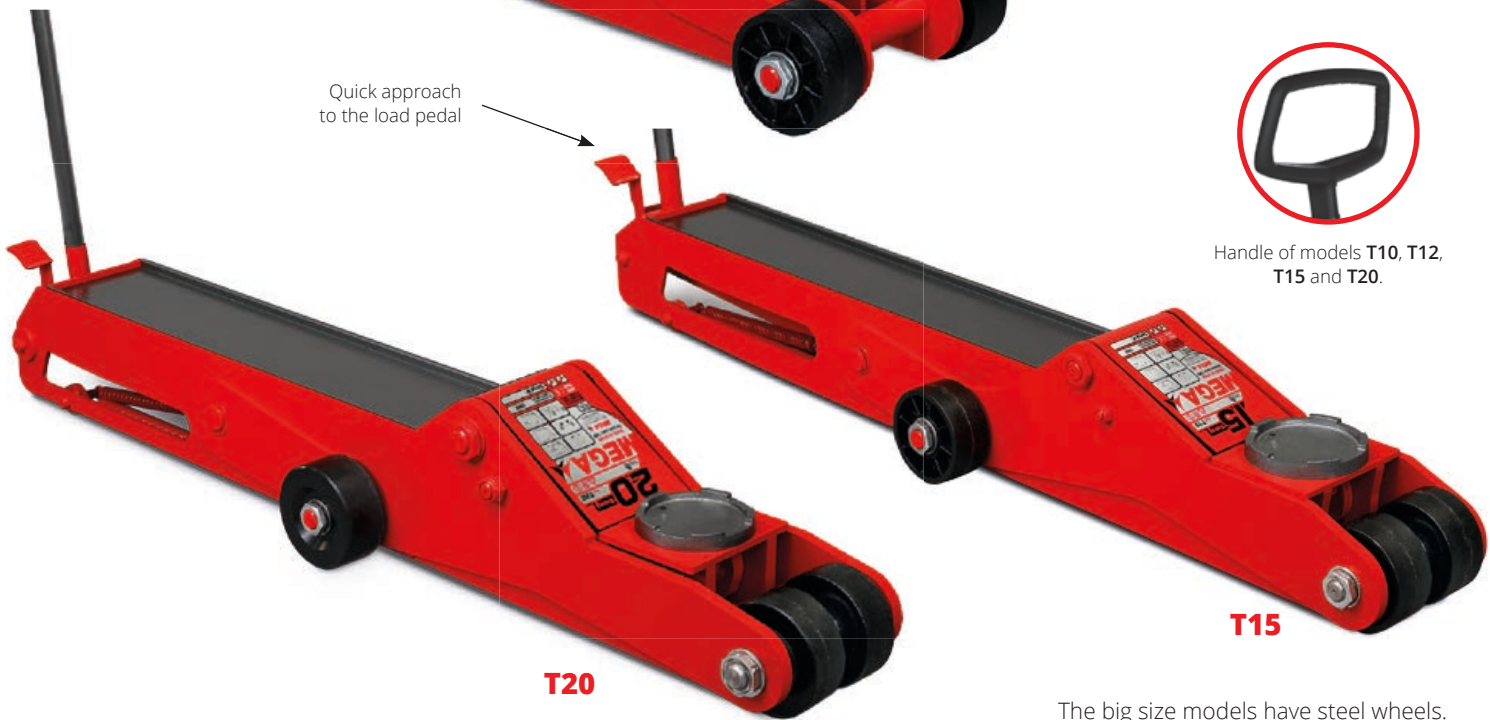


T20

T15

The big size models have steel wheels.

Capacity (t)	6	10	12	15	20
A	170	170	190	195	200
B	220	270	270	265	310
C	580	605	580	600	615
D	1250	1535	1482	1575	1585
E	1310	1600	1550	1750	1777
F	2215	2530	2480	2680	2707
G	414	414	414	375	415
H	336	386	386	255	302
Weight (kg)	81	120.5	123	145	234.5
References	T6	T10	T12	T15	T20

Measurements in mm.

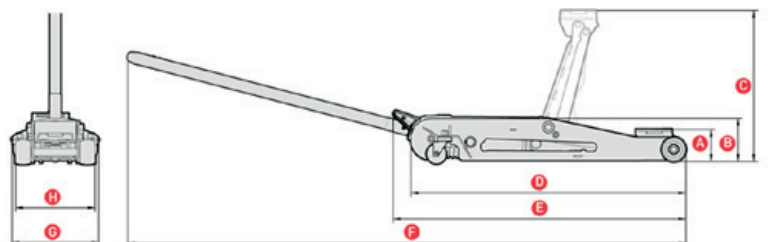



Air hydraulic jacks for heavy vehicles N

Specially designed to work on heavy vehicles, assistance, tire and bodywork workshops. Highest quality steel. Their chrome molybdenum vanadium composition, strengthened by an anti-corrosion and anti-seize treatment through salt bath nitriding provides the jacks unbeatable resistance and durability properties. Modular concept. The independent modular construction design - lifting block, valve unit, pump motor, release cylinder and tank, simplifies assembly and makes maintenance easier. High approach speed and efficient load lifting. Keeps high the load even if the air supply is interrupted. Recommended working pressure between **6 and 8 bar**.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

EN 1494



Safety overload valve.



LCS Lowering Control System.



Hydraulic stroke limiter.



Operation by "dead man's" principle.



N15-2B



Minimum height
150 mm.



N10-3



Minimum height
125 mm.



N15-2



Minimum height
185 mm.



N15-4



Minimum height
155 mm.

Optional accessories

A-5206



L= 50 mm.

N15-2B
N15-2
N15-4
N20-3
N25

A-5205



L= 100 mm.

N10-3



Single control switch.
Handy and easy to use.



A-5270

ESSENTIAL!

Workshop in-line air filter-regulator-lubricator.
Optional.

415 mm. / 20t.
334 mm. / 35t.
258 mm. / 65t.



N20-3



Minimum height
180 mm.



Rotating handle on models that, due to their size and weight, can be transported by hand.

323 mm. / 25t.



N25



Minimum height
215 mm.

Accessories included

A-5211



L= 60 mm.



N10-3

A-5212



L= 100 mm.

- N15-2B N15-4
- N15-2 N20-3
- NP15-2B N25

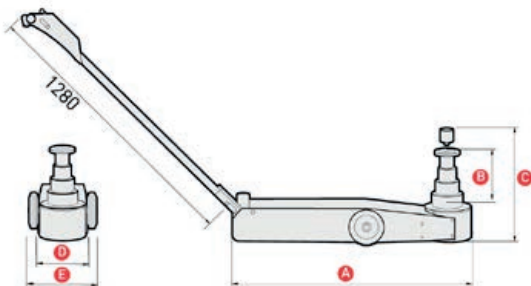

Capacity (t)	10-20-35	15-30	15-30	15-30-50-80	20-35-65	25
A	807	807	807	810	793	560
B	160	185	150	235	235	108
C	345	470	400	490	515	423
D	157	157	157	212	194	157
E	260	280	280	317	317	280
Weight (kg)	41	46.5	43.5	70.5	69.5	47
References	N10-3	N15-2	N15-2B	N15-4	N20-3	N25

Measurements in mm.



Look at the instructions on our Youtube channel

Portable air hydraulic jack NP



Compact and lightweight design makes it perfect for heavy-duty roadside assistance. Reduced chassis width for positioning under the lifting point in areas of difficult access. It can be used with the vehicle's own compressor and be carried on board without occupying much space due to its small size (the jacks can lift the nominal load with the extra extension).



AVAILABLE
IN GREY



**BUREAU
VERITAS**

EN 1494



Safety overload valve.



LCS Lowering Control System.



Hydraulic stroke limiter.



Operation by the "dead man's" principle.



The telescopic handle locks in three positions:
A and **B** for transport and **C** position for working.




YouTube



A-5270

ESSENTIAL!

Workshop in-line air filter-regulator-lubricator. Optional.

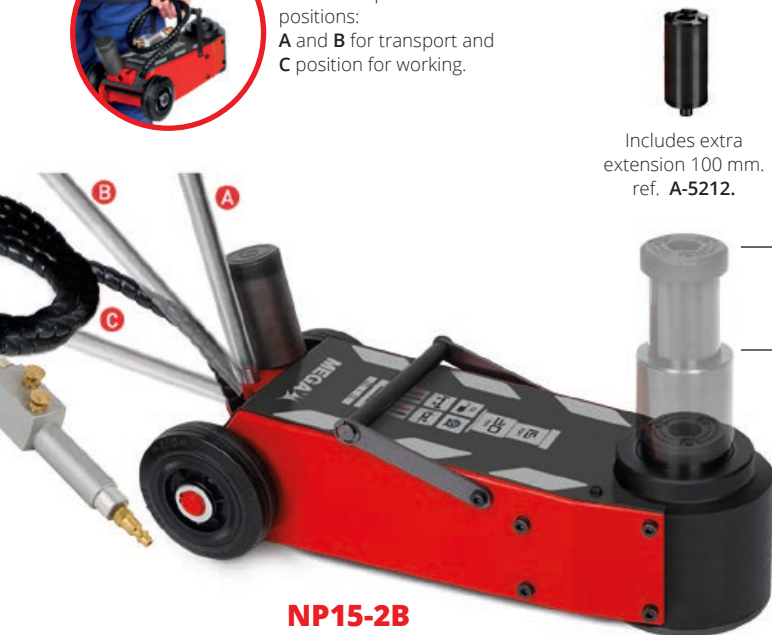

NP15-2B

Includes extra extension 100 mm. ref. A-5212.

— 300 mm. / 15t.


— 223 mm. / 30t.



Handle in working position.



Minimum height
150 mm.

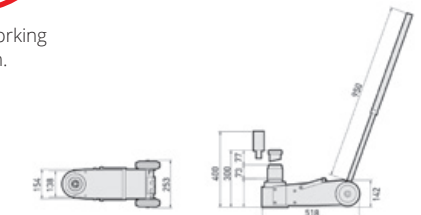

Ref.	Capacity (t)	Kg
NP15-2B	15-30	31

Air hydraulic bottle jack BRB



They are very compact models. Their monobloc -integrated tank- and welded construction reduces their dimensions and makes transportation easier. Ideal for roadside assistance. All models have an extension screw for a fast load approach, a high-performance remote-operated air pump and a salt bath nitriding hardened piston that ensures a long working life.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

Conforms to the standard:
American ASME PASS




Swivel handle accessible in any position and rotating carrying handle.



A-5270


ESSENTIAL!

Workshop in-line air filter-regulator-lubricator. Optional.



Capacity (t)	20	30
A	234	242
B	138	138
C	75	75
D	447	455
Weight (kg)	15.5	20
Air pressure	7 bar / 100 psi	
Necessary air flow	270 l/min / 9.5 clm	
Reference	BRB20	BRB30

Measurements in mm.


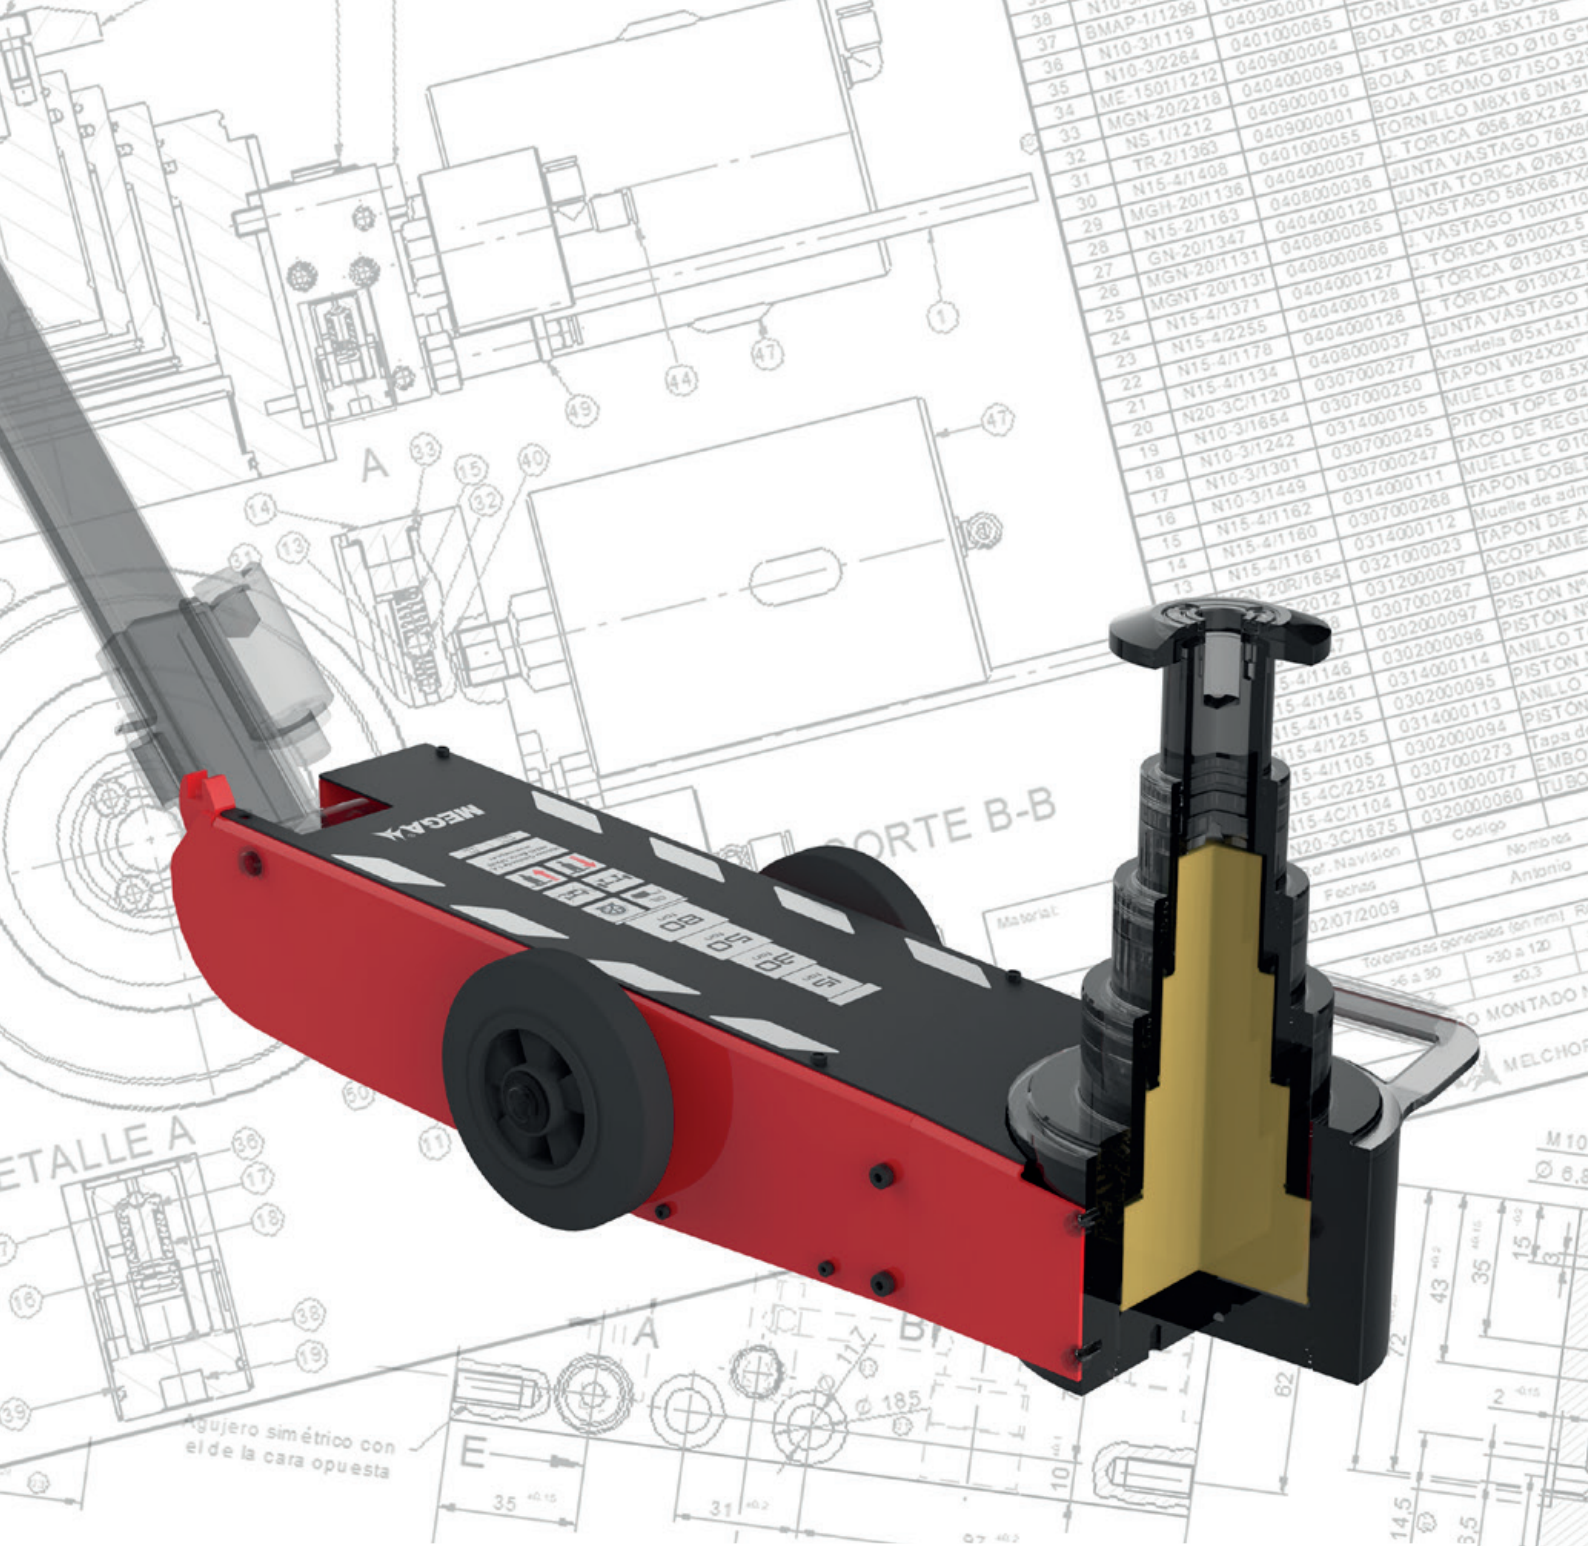


38	N10-3/1199	0403000010	TORNILLO
37	BMAP-1/1299	0403000010	TORNILLO
36	N10-3/1119	0401000085	BOLA CR Ø7.94 ISO
35	N10-3/2264	0409000004	J. TORICA Ø20.35X1.78
34	ME-1501/1212	0404000089	BOLA DE ACERO Ø10 G2
33	MGN-20/2218	0409000010	BOLA CROMO Ø7 ISO 32
32	NS-1/1212	0409000001	TORNILLO M8X16 DIN-91
31	TR-2/1363	0401000055	J. TORICA Ø56.82X2.62
30	N15-4/1408	0404000037	J. TORICA Ø76X3
29	MGH-20/1138	0408000036	JUNTA VASTAGO Ø76X3
28	N15-2/1163	0404000120	JUNTA TORICA Ø76X3
27	GN-20/1347	0408000085	J. VASTAGO 56X66.7X
26	MGN-20/1131	0408000086	J. VASTAGO 100X110
25	MGN-20/1131	0404000127	J. TORICA Ø100X2.5
24	N15-4/1371	0404000128	J. TORICA Ø130X2.5
23	N15-4/2255	0404000128	JUNTA VASTAGO
22	N15-4/1178	0408000037	JUNTA VASTAGO
21	N15-4/1134	0307000277	Arandela Ø5x14x1
20	N20-3C/1120	0307000250	TAPON W24X20
19	N10-3/1654	0314000105	MUELLE C Ø10
18	N10-3/1242	0307000245	PITON TOPE
17	N10-3/1301	0307000247	TACO DE REC
16	N10-3/1449	0314000111	MUELLE C Ø10
15	N15-4/1162	0307000288	TAPON DOBL
14	N15-4/1180	0314000123	Muelle de adm
13	N15-4/1161	0321000023	TAPON DE A
12	GN-20R/1654	0321000097	ACOPLAMIE
11	GN-20/1212	0312000267	BONA
10	GN-20/1212	0307000277	PISTON N°
9	GN-20/1212	0302000097	PISTON N°
8	GN-20/1212	0302000096	PISTON N°
7	GN-20/1212	0302000096	PISTON N°
6	GN-20/1212	0314000114	ANELLO T
5	GN-20/1212	0302000095	ANELLO T
4	GN-20/1212	0302000095	ANELLO T
3	GN-20/1212	0314000113	PISTON
2	GN-20/1212	0302000094	PISTON
1	GN-20/1212	0307000273	Tapa de
	GN-20/1212	0301000073	EMBO
	GN-20/1212	0320000080	TUBO



Bottle jacks 3 – 10 t BR

Equipped with a unique rotatory pump socket system which can be operated from any position. All models have an extension screw for fast load approach. The base and bottle body are welded, providing greater durability, stability and safety in use. Telescopic zinc-plated handle, easy to store. Adequate length to ensure moderate pumping effort.



**AVAILABLE
IN GREY**



**BUREAU
VERITAS**

EN 1494

**Conforms to the standard:
American ASME PASE
CE official certification**




BR3




Extension screw
for longer travel.

BR5

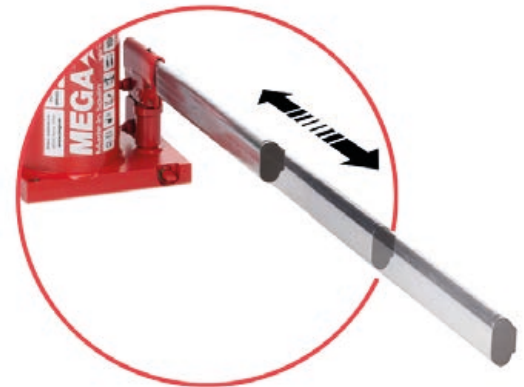

Zinc-plated telescopic handle.

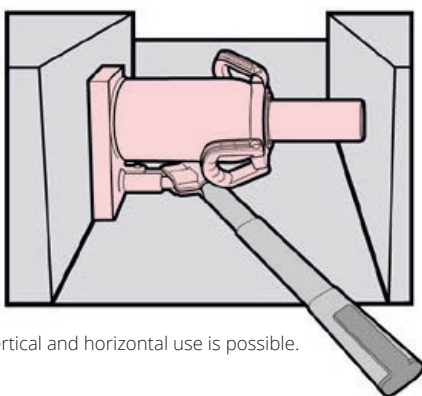


Vertical and horizontal use is possible.



BR10



**You
Tube**



Capacity (t)	3	5	8	10
A	168	212	219	219
B	105	150	150	150
C	65	75	75	75
D	338	437	444	444
Weight (kg)	3.7	4.5	6.2	6.4
References	BR3	BR5	BR8	BR10

Measurements in mm.

Bottle jacks 12 – 100 t **BR** and **MGD**

Heavy duty hydraulic jacks designed and tested for high performance work. Models from 20t upwards are equipped with a rotating carrying handle and an integrated support to place the telescopic handle and facilitate storage. Equipped with a unique rotating pump system which can be operated in any position. All models have an extension screw for a fast approach to the load. The welded base and body of the bottle provides greater stability and safety. Zinc-plated telescopic handle easy to store. Length suitable for moderate pumping effort.



AVAILABLE IN GREY



Safety overload valve.



Hydraulic stroke limiter.



BR50



Rotating carrying handle.
Rotating transport handle
Where the Jack lever is housed as from the 20 ton model.



BR30

Extension screw for longer travel




MGD-100



Rotary pump socket.

The **MGD-100** model is equipped with pressure gauge and has two pumps (approach and operation).



Capacity (t)	12	15	20	30	40	50	100
A	226	228	234	242	246	260	300
B	150	150	150	150	150	140	150
C	75	75	75	75	-	-	-
D	451	453	459	467	396	400	450
Carrying handle	-	-	•	•	•	•	•
Weight (kg)	8.5	8.8	10.6	14.5	22.5	27	87
References	BR12	BR15	BR20	BR30	BR40	BR50	MGD-100


Measurements in mm.

Low profile bottle jacks **BRS**

Designed for special applications, to access very small spaces which cannot be reached with a standard jack.
Equipped with a unique rotating pump system accessible in any position.
All models have an extension screw for fast load approach.



AVAILABLE
IN GREY



Capacity (t)	5	10	15	20
A	135	131	150	190
B	70	62	75	105
C	40	30	40	55
D	245	223	225	350
Weight (kg)	3.7	5	7.2	9.5
References	BRS5	BRS10	BRS15	BRS20

Measurements in mm.



BRS10

Telescopic bottle jacks **BRT**

Design that combines a low minimum height with a long lifting range thanks to its two telescopic pistons.
Equipped with a unique rotating pump system accessible in any position.




AVAILABLE
IN GREY



BRT12



BRT2



Capacity (t)	2	5	12	20
A	145	215	245	180
B	165	300	326	205
C	50	-	-	-
D	360	515	571	385
Weight (kg)	4.8	8.3	15.4	22
References	BRT2	BRT5	BRT12	BRT20

Measurements in mm.

Toe jack **MGL**

Designed for the safe lifting of very low and difficult to handle elements.
Ideal for forklift maintenance, lifting of heavy machinery.
The lifting claw is removable and adjustable in two positions.

BL10 + BR10 = MGL10

CHASSIS BOTTLE PRODUCT






BL10



Extra low lifting
claw (25 mm)



MGL10



Position 2: for higher
lifting points.



Melchor Gabilondo S.A.
48240 Berriz SPAIN
www.mega.es

REF.
BR20

20 ton

MEGA[®]

Made in Spain

Since 1940

- ANSI
- PALD
- CE
- OIL
- SAFETY
- OK
- NO

Parallel legs folding cranes CRP

The CRP models are strong and robust cranes with parallel legs designed to house a pallet under the arm that allows safely placing the load on the pallet. Fitted with two handles and a new tilting system consisting of 4 wheels at the back and 2 at the front, they are very easy to handle and move, both with and without load.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

CE official
certification



Safety overload valve.



LCS Lowering Control System.




Hydraulic stroke limiter.



Operation by the "dead man's" principle.





Swivel hydraulic unit for use in different positions. It incorporates a knob with an extremely precise lowering control.

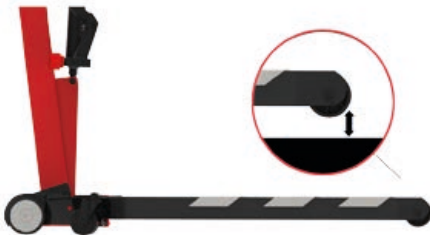

Crane swings on swivel wheels. Front wheels do not touch the ground when crane is not loaded. Maximum manoeuvrability. **Patented.**



Compact design is perfect for storage in small spaces. All models are equipped with polyamide wheels that facilitate manoeuvrability, do not damage the garage floor, do not rust and are very silent.



CRP20

Tonnage indicator. Push button for automatic arm position change. **Patented.**

Plastic protections that prevent possible damage to vehicles and serve as a safety warning due to their excellent visibility.

The pedal makes it easier to manoeuvre the crane when it is empty. **Patented.**

Capacity (kg)	1000	2000
A	1580	1740
B	2200	2460
C	1480	1800
D	870	1070
E	122	170
R minimum	960	1200
R maximum	1300	1610
F	620	740
G	300	300
H	865	1050
Weight (kg)	99	150
References	CRP10	CRP20

Measurements in mm.



BUREAU VERITAS

CE official certification



AVAILABLE IN GREY

Standard folding cranes CRV

Workshop crane that allows the removal and maintenance of a vehicle's engine so that the entire repair can be carried out in complete safety. MEGA CRV models are strong and robust cranes, specially designed for easy folding and unfolding. Equipped with two handles and a new tilting system with 4 wheels at the back and 2 at the front, very easy to handle and move, both with and without load. Compact design perfect for storing in small spaces. All models are equipped with polyamide wheels that facilitate manoeuvrability, do not damage the garage floor, do not rust and are very silent.



Safety overload valve.



Operation by the "dead man's" principle.



Hydraulic stroke limiter.



LCS Lowering Control System.

Greater robustness, stability and accessibility thanks to the double legs in the CRV10 and CRV20 models.



Swivel hydraulic unit for use in different positions. It incorporates knob with an extremely precise lowering control.

Crane swings on swivel wheels. Front wheels do not touch the ground when crane is not loaded. Maximum manoeuvrability. Patented.



Compact design is perfect for storage in small spaces.

All models are equipped with polyamide wheels that facilitate manoeuvrability, do not damage the garage floor, do not rust and are very quiet.




Tonnage indicator. Push button for automatic arm position change. Patented.



CRV20

Plastic protections that prevent possible damage to vehicles and serve as a safety warning due to their good visibility.

The pedal facilitates manoeuvrability of the empty crane. Patented.

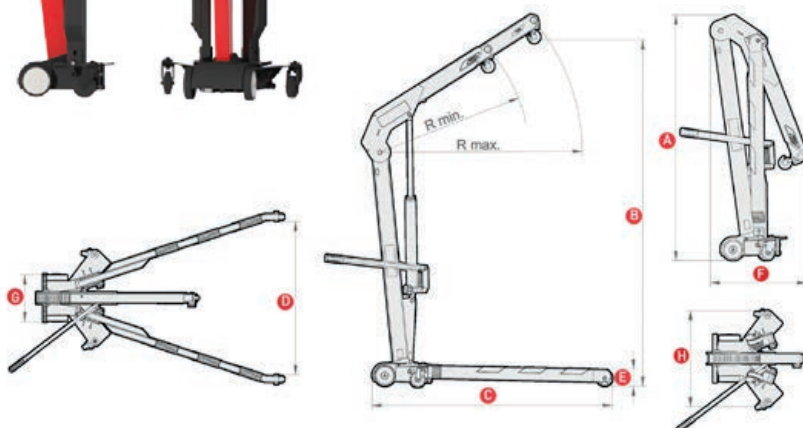

Capacity (kg)	650	1000	2000
A	1580	1580	1740
B	2200	2200	2460
C	1450	1525	1830
D	830	970	1100
E	112	112	170
R minimum	960	960	1200
R maximum	1300	1300	1610
F	615	615	680
G	300	300	300
H	615	615	725
Weight (kg)	81	85	143
References	CRV6	CRV10	CRV20

Measurements in mm.

High performance crane CRM

The CRM model crane has a reinforced structure, very stable due to its width, making it suitable for safely and reliably operating heavy loads. The design of the extendable and folding arm, allows maximum operator approach.



The 3t model, CRM30, is equipped with a two piston pump.



AVAILABLE IN GREY



BUREAU VERITAS
CE official certification



Safety overload valve.



Hydraulic stroke limiter.




Operation by "deadman's" principle.



LCS Lowering Control System.

Large polyamide wheels that facilitate manoeuvrability, do not damage the garage floor, do not rust and are very silent.

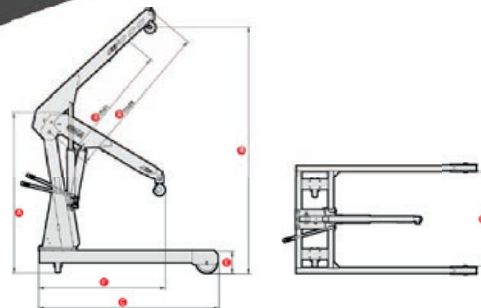


CRM30

Capacity (kg)	3000
A	1919
B	2942
C	2143
D	1126
E	268
R minimum	1430
R maximum	1880
F	1507
Weight (kg)	302
References	CRM30

Measurements in mm.

Accessories

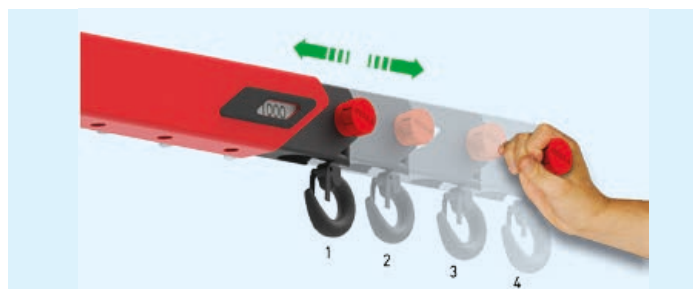

The extendable arm changes position with a simple touch of the bottom. Equipped with handle and positioning guiding window that shows the maximum working load. **Patented.**

Position (kg)	1	2	3	4
Reference	Loading capacity			
CRV6	650	550	450	350
CRV10/CRP10	1000	900	800	700
CRV20/CRP20	2000	1750	1500	1250
CRM30	3000	2500	2300	2100

Measurements in mm.



AB-300



Drum lifting clamp. For 200 litre steel drums. Only for closed drums with flange or removable top drums, provided the lid is properly closed. **Optional.**



A-5298

L = 1 m

Load leveller. **Optional.**

High lift or under platform transmission jacks TRS

Designed to work in pits or underneath elevated vehicles.
Lifting and lowering of the load using the foot pedal allow hands to be free.
Easy manoeuvrability thanks to four swivel castors and a very stable base.
All controls are pedal-operated.



AVAILABLE
IN GREY



BUREAU
VERITAS

EN 1494



Safety overload valve.



LCS Lowering Control System.



Hydraulic stroke limiter.



Operation by the "dead man's" principle.



TRS750

Unique jack with two pedal controls.
Maximum stability, comfort and functionality.

Rubber protections that prevent possible damage to vehicles or crane legs.
Great safety warning to avoid knocks or tripping thanks to their good visibility.




Protective foam block included.
Patented.



Handle with screws tray,
adjustable to different positions.

Capacity (kg)	300	750	1200
A	1200	1110	1110
B	850	820	815
C	315	315	315
D	2050	1930	1925
E	60	60	60
F	720	720	720
Weight (kg)	26	28	34
References	TRS300	TRS750	TRS1200

Measurements in mm.

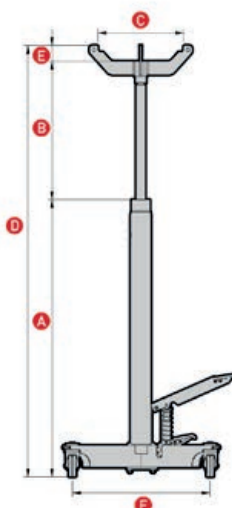

Accessories



PF350

Adjustable platform with chains.
Capacity : 350 kg.
Optional.

Workshop column press PRB

20/30 t manual

The compact and reinforced structure guarantees maximum robustness and resistance to stress. Specially designed to save as much space as possible in the workshop. Spring return system cylinder.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

CE official
certification



Safety overload valve.



Hydraulic stroke limiter.




Extendable spindle with
fast and precise approach.



Extendable screw for a fast
and precise approach to the
working position.




Set of punches.
Optional.



Reversible V blocks with extraction
space with sliding guide for secure
fastening. Patented.



Legs with bolt holes to fix
on the floor.

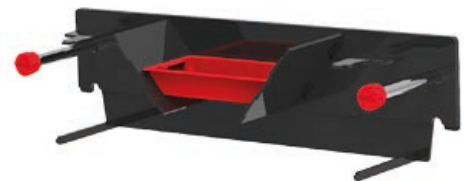

The lower tray can be placed into the workbench.
Designed to collect parts, grease, dirt, etc.
Patented.




Easy access cover for maintenance

Chassis-integrated
pressure gauge

Workbench adjustable
to different heights

PRB30

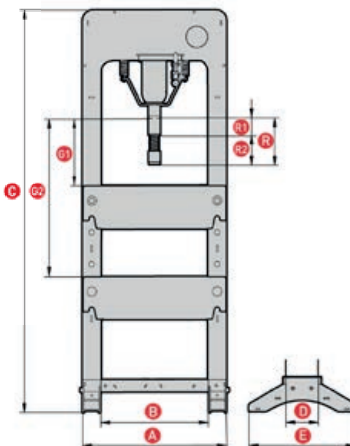

Capacity (t)	20	30
A	670	670
B	530	530
C	1850	1850
D	132	132
E	488	488
G1 minimum	12	53
G2 maximum	762	740
R1 run	150	150
R2 spindle stroke	75	75
R total run	225	225
Weight (kg)	100	104
References	PRB20	PRB30

Measurements in mm.

See optional accessories on page 27

Compact press with cylinder PRC

Manual or pneumatic 20/30/50 t

Functional and compact design, ideal for workshops and garages with limited space. Hydraulic press equipped with a piston that allows more working space.



AVAILABLE IN GREY



BUREAU VERITAS

CE official certification



-  Safety overload valve.
-  Hydraulic stroke limiter.
-  Piston with automatic return.
-  Extendable screw for fast and precise approach.



The manual model includes two levers: approach and operation.

Easy access cover for maintenance

Integrated pressure gauge on the chassis




Set of punches Optional.

Workbench adjustable to different heights




Extendable screw for a fast and precise approach to the working position.




Reversible V blocks with extraction space with sliding guide for secure fastening. Patented.




The tray can be placed into workbench. Designed to collect parts, oil, grease, dirt. Patented.



New pneumatic pedal on NF models.

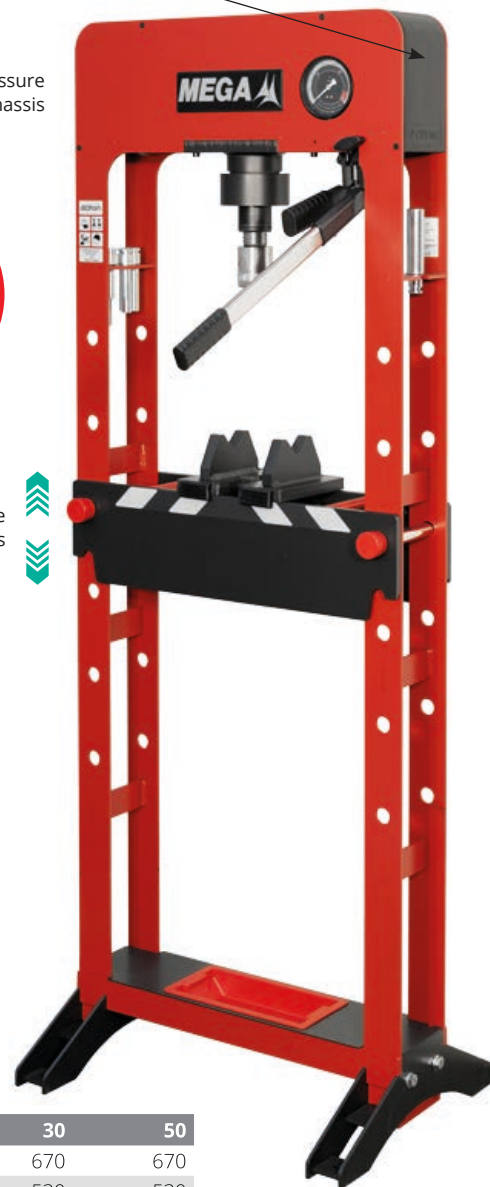

PRC30

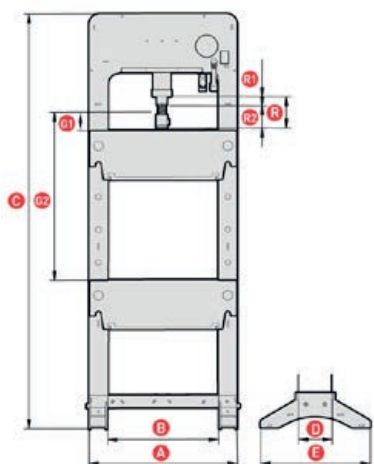

See optional accessories on page 27

	Capacity (t)	20	30	50
A		670	670	670
B		530	530	530
C		1850	1850	1850
D		132	132	132
E		488	488	488
G1 minimum		21	17	66
G2 maximum		858	854	766
R1 run		120	120	120
R2 spindle stroke		75	75	75
R total run		195	195	195
Weight (kg)		106	112	145
References				
Double hand pump		PRC20	PRC30	PRC50
Manual and pneumatic foot pump		PRC20NF	PRC30NF	PRC50NF

Measurements in mm.



Legs with bolt holes to fix on the floor.

Robust press with sliding cylinder PRD

Manual or pneumatic 20/30/50 t

Robust design with wider chassis for easier handling in the working area. Integrates all hydraulic elements within the chassis, protecting them and saving space in the workshop.



AVAILABLE
IN GREY



**BUREAU
VERITAS**

CE official
certification



Safety overload valve.




Hydraulic stroke limiter.





Piston with automatic return.



Extendable screw for fast and precise approach.

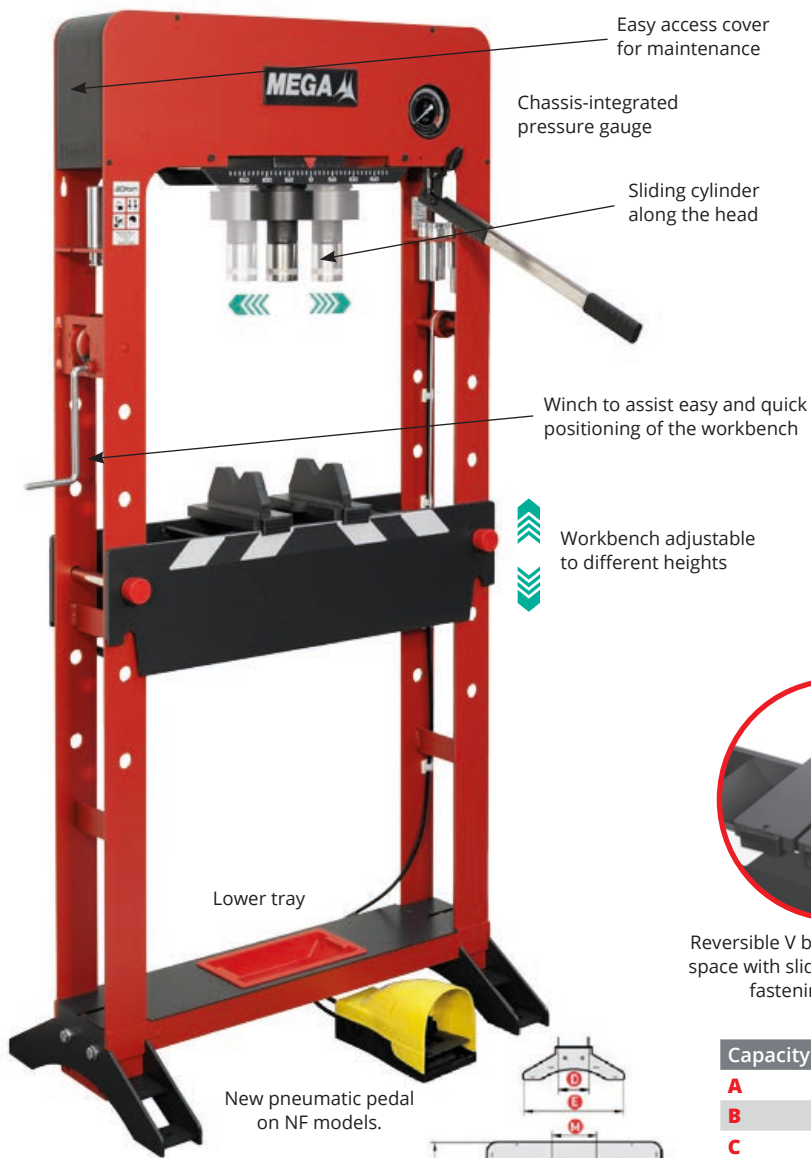

PRD20NF

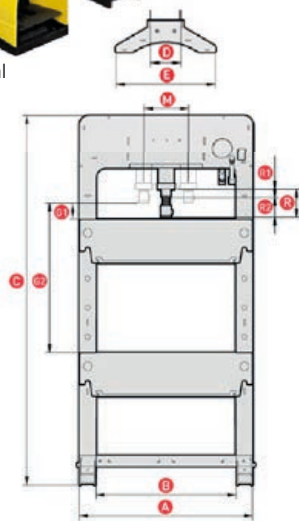

Capacity (t)	20	30	50
A	890	890	890
B	720	720	720
C	1900	1900	1900
D	150	150	150
E	490	490	490
G1 minimum	84	84	84
G2 maximum	770	770	770
R1 run	120	120	120
R2 spindle stroke	75	75	75
R total run	195	195	195
M lateral run	228	212	189
Weight (kg)	143	147	191

References	PRD20	PRD30	PRD50
Double hand pump	PRD20NF	PRD30NF	PRD50NF
Manual and pneumatic foot pump	PRD20NF	PRD30NF	PRD50NF

Measurements in mm.

See optional accessories on page 27

Premium PRP press "Hands-free" pneumatic 30/50 ton

The most complete premium press on the market, equipped with all the accessories as standard. Its special design with the operation and discharge controls on the pedals, allows the operator to free his hands, facilitating his work in the fast and precise positioning of the element in the press. Larger chassis width for easier handling in the working area.



AVAILABLE
IN GREY



BUREAU
VERITAS

CE official
certification



Safety overload valve.



Piston with automatic return.



Hydraulic stroke limiter.



Extendable screw for fast and precise approach.

Easy access cover for maintenance

Integrated pressure gauge on the chassis


Sliding cylinder along the head

Adjustable workbench at different heights

Extendable screw for a fast and precise approach to the working position.




Presses prepared for fixing on the ground.



Reversible V blocks with extraction space with sliding guide for secure fastening. **Patented.**




Bottom tray designed to collect parts, oil, grease, dirt. It can also be placed on the central work table. **Patented.**

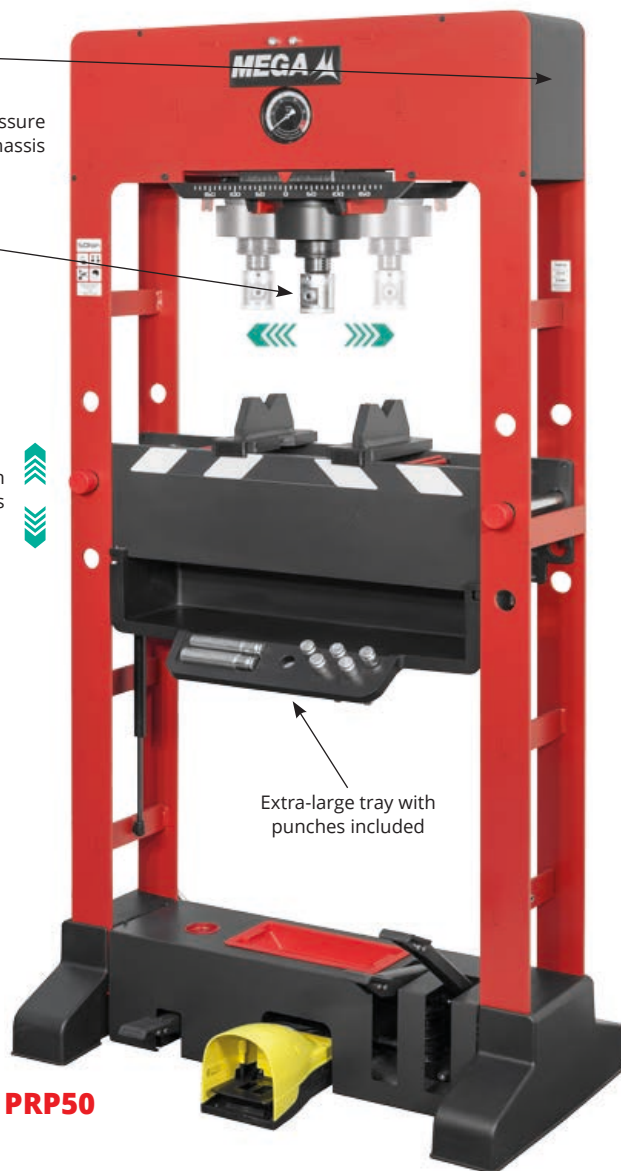

PRP50

Extra-large tray with punches included




1. Release pedal.
2. Pneumatic operation pedal.
3. Fast approach pedal.
4. Pressure pedal.

See optional accessories on page 27

Capacity (t)	30	50
A	890	890
B	720	720
C	1920	1920
D	195	195
E	490	490
G1 minimum	85	80
G2 maximum	470	465
R1 run	120	120
R2 spindle stroke	75	75
R total run	195	195
R lateral run	252	229
Weight (kg)	180	225
References	PRP30	PRP50

Measurements in mm.

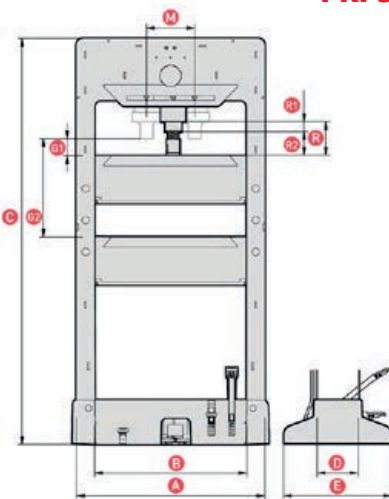

Large tonnage press K Manual or electric

Professional use press with double-acting cylinder, especially recommended for garages, repair shops and industrial maintenance.
Robust construction designed for precise operation when extracting, bending, straightening, pressing, etc.
Solid structure with a front width of 1200mm and a workbench easily adjustable with a winch that can be set at 5 different heights.
Included set of 2 V-blocks with sliding guide and extraction space.



AVAILABLE
IN GREY



Safety overload valve.



Hydraulic stroke limiter.



Piston with automatic return.




K100

Two pump options:

- **K100E:** Press with double-stage electric pump with 1400 rpm asynchronous motor. Three-phase 230/380V motor with electrical circuit breaker for automatic opening of the power. Double-acting distributor. Equipped with magneto-thermal switch and direct oil level sight glass.
- **K100:** Manual operation, with double acting pump, one approach speed and a more powerful second speed for more efficient work.



Electric pump model K100E.

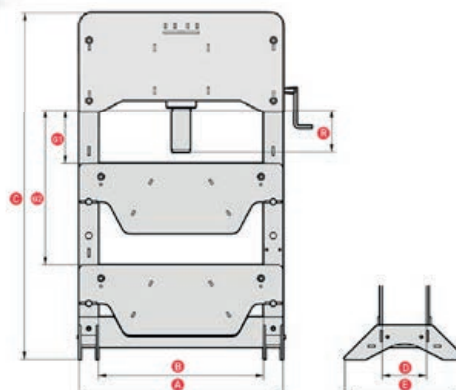





Capacity (t)	100
A	1200
B	975
C	2050
D	260
E	715
G1 minimum	115
G2 maximum	915
R total run	250
Weight (kg)	620
References	
With hand pump	K100
With electric pump	K100E

Measurements in mm.


Desktop press PRS

Welded robust monoblock chassis presses, specially designed to be used on tables and workbenches. Ultra-light for easy transport.

-  Safety overload valve.
-  Hydraulic stroke limiter.
-  Piston with automatic return.
-  Extendable screw for fast and precise approach.



Set of punches. Optional.



Reversible V-blocks with sliding system for secure fastening.




Extendable screw for fast and precise approach to the operating position.

Adjustable workbench at different heights

Capacity (t)	15
A	550
B	430
C	800
D	132
E	350
G1 minimum	45
G2 maximum	338
R1 run	95
R2 spindle stroke	75
R total run	170
Weight (kg)	48
References	PRS15

Measurements in mm.

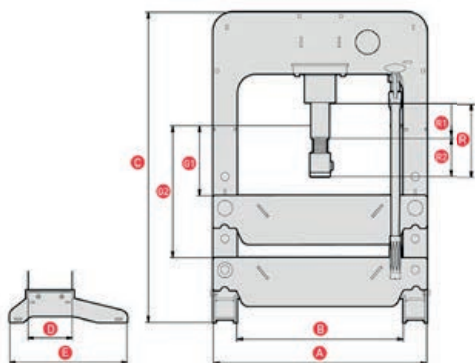

AVAILABLE IN GREY



BUREAU VERITAS

CE official certification



Chassis-integrated pressure gauge

Easy access cover for maintenance



PRS15

Presses prepared for fixing on the ground.



The tray can be placed into the workbench. Designed to collect parts, grease, dirt, etc. Patented.


Accessories

Press protection

Available for model PRC (ref. A-5613), models PRD and PRP (ref. A-5612).



A-5270
Workshop in-line air filter-regulator-lubricator. Optional.

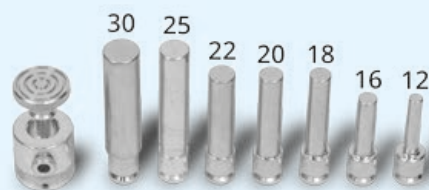

Available for all models.

A-5600: Set of punches for 30 and 50 t presses. Optional.

A-5601: Set of punches for 15 and 20 t presses. Optional.

* As the cylinders develop more force than the accessories, the punches should never exceed half their nominal force.



Available only for model PRD (ref. A-5609).

A-5609: Optional punches tray.

Jacking beams MA

Designed to work in pits or four-column lifting bridges. Essential for tyre change and alignment, brake and suspension repair, etc., when lifting both wheels on the same axle. Adaptable to any width of pit or lifting bridge and any type of track. The extendable arms and extension lifting saddles facilitates exact positioning of vehicles. Sturdy construction. They can be supplied either with flat rollers or grooved on request.



AVAILABLE
IN GREY



Safety overload valve.



LCS Lowering Control System.



Hydraulic stroke limiter.



Operation by the "dead man's" principle.



MA-2

MA-21

Required air pressure: 7-10 bar / 100-145 psi.
Necessary air flow: 270 l/min / 9.5 cfm.




A-5270

ESSENTIAL!

Workshop in-line air filter-regulator-lubricator.
Optional.




Automatic mechanical locking device against unexpected descent.



Optional: supplied with 2 extensions of 100 mm. with rubber protection cover, ref. GR2-1108S.

Capacity (kg)	2000	2000
A	1680	1680
B	885	885
C	340	340
D	100	100
E	830	792
F	1240	1202
G	220	220
H	490	490
J	30	160
Weight (kg)	129	125
References	MA-2	MA-21

Measurements in mm.

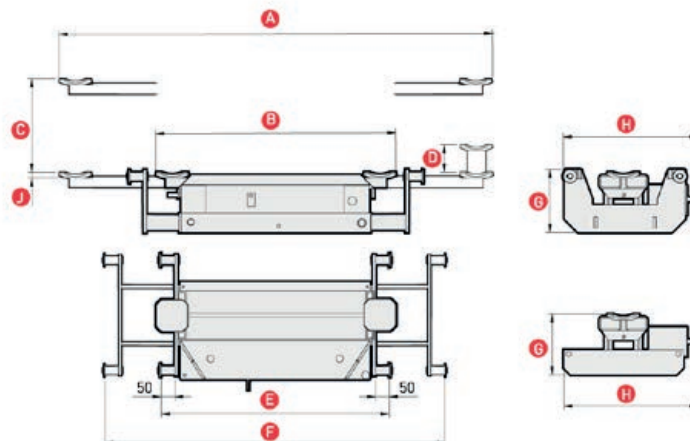

Lifting tables ME

All models have polyamide wheels for better manoeuvrability, do not damage the garage floor, do not rust and are quiet when operated. The table can be locked at different heights with safety bolts.



Safety overload valve.



Hydraulic stroke limiter.



LCS Lowering Control System.



Operation by the "dead man's" principle.



Handle of the ME-650 model.





Handle of the ME-1500 and ME-2500 models.

Capacity (kg)	650	1500	2500
A	215	210	300
B	645	880	880
C	830	1020	1060
D	500	500	540
E	1060	1380	1440
F	645	690	795
Weight (kg)	71	135	187
References	ME-650	ME-1500	ME-2500

Measurements in mm.



ME-1500



The wheels are equipped with brakes and foot protections.



AVAILABLE IN GREY



Pneumatic table for motorcycles PTM

Unique in the market for its high lifting speed (3 to 8 seconds). A safety device allows the table to be locked at different heights and prevents any unexpected descents.



Safety overload valve.



LCS Lowering Control System.



Hydraulic stroke limiter.




Operation by the "dead man's" principle.

Manual control of the descent speed. Supplied with chain for fixing the front wheel. Essential for convenient repair and maintenance of motorbikes.



AVAILABLE IN GREY




A-5099
Clamp. Accessory for securing the motorcycle to the table.
Optional.



A-5270


ESSENTIAL!

Workshop in-line air filter-regulator-lubricator.
Optional.



Capacity (kg)	450
Weight (kg)	161,5
Reference	PTM-2

Measurements in mm.

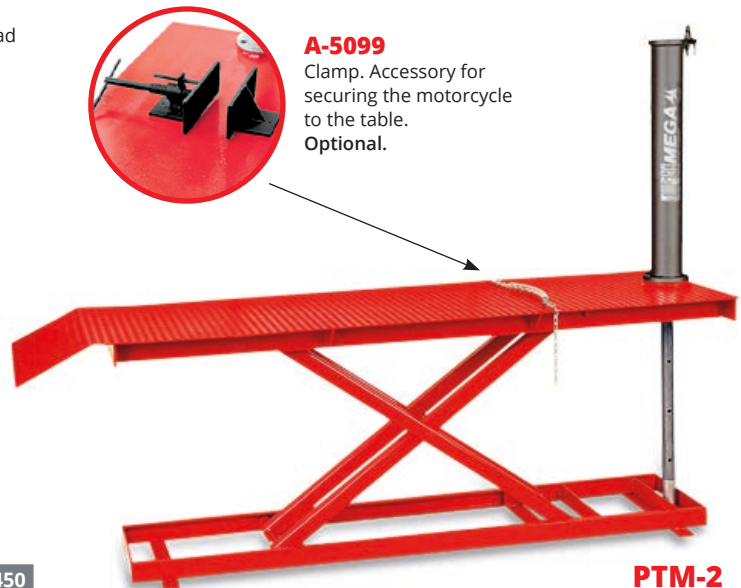

PTM-2

Required air pressure: 7-10 bar / 100-145 psi.
Required air flow: 270 l/min / 9.5 cfm.

Wheel dolly SCR

Manual support handle to reduce the lifting effort when working at maximum capacity is required. Chain for safe handling of the wheels.



AVAILABLE
IN GREY



SCR700



Safety overload valve.



Lowering Control system (LCS).



Hydraulic stroke limiter.



Operation on the "dead man's" principle.


Special design for removal of twin and large size wheels. Each arm has two rollers to allow the truck's twin wheels to turn independently. Lifting arms adjustable in five positions.



Lifting and lowering on the pedal keeps your hands free.

Capacity (kg)	700
Width between rollers	480-750
Min. roller height	110
Max. elevation	630
Weight (kg)	152
Reference	SCR700

Measurements in mm.

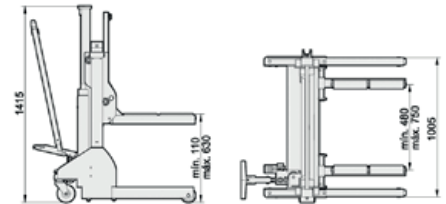

Transmission jack GCB

Suitable for the assembly of gearboxes, transmissions, engines. It has chains for the safe movement of the load. Equipped with detachable pump, which allows the jack to be used in any position.



AVAILABLE
IN GREY



GCB-2




Safety overload valve.



Hydraulic stroke limiter.

Capacity (kg)	1000
Weight (kg)	86
Reference	GCB-2

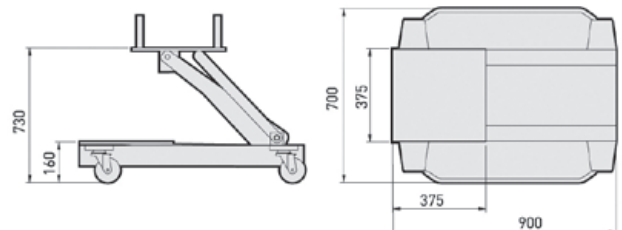



Body repair kits GC

The most complete body repair kit due to its number of accessories.

Important advantage: Safer and sturdier thanks to the threaded connections which allow pulling operations, compared with other more extensive but less reliable connection systems in the market which only allow pushing operations. Indispensable for jobs such as body repairs, rescue and roadside service or any other pushing, pulling, separating or lifting applications that require hydraulic force.

IMPORTANT: As the cylinders have a greater capacity than the accessories, especially the chain, the separating components, the fixing clamps, tube extension, etc. **they should never exceed half of the rated capacity.**

The maximum capacity of the SH-1 expansion cylinder is 1t and the maximum working load of the chain is 1t.

Safety overload valve.

Hydraulic stroke limiter.

Piston return by internal spring.

CT-5
Pulling cylinder.
Optional.



GC-10

References	Mod.	Cap. (t)	Rec. (mm)
CT-5	GC-10	5	138
CT-10	GC-20	10	138



Capacity (t)	10	20
1	BM-04	BM-04
2	CC-10-B	CC-20-B
3	GC-10/2272	A-5167
4	A-5541	A-5541
5	A-5033 / Ø 42 L 700	A-5233 / Ø 60 L 700
6	A-5034 / Ø 42 L 480	A-5234 / Ø 60 L 460
7	A-5035 / Ø 42 L 230	A-5235 / Ø 60 L 255
8	A-5048	-
9	A-5042	A-5242
10	A-5038	A-5238
11	A-5053	-
12	A-5054	-
13	A-5055	A-5284*
References	GC-10	GC-20

Capacity (t)	10	20
14	A-5050	A-5280*
15	A-5039	A-5239
16	A-5036 / Ø 42 L 130	-
17	A-5049	-
18	SH-1	-
19	A-5043	-
20	A-5086	-
21	A-5057	-
22	A-5058	-
23	A-5056	-
24	A-5051	A-5252*
25	A-5052	-
Weight (kg)	41.5	45
References	GC-10	GC-20

* These components have a different design from the one shown in the photo.

Body aligning set EHA

Designed to carry out precise repair of the most badly-damaged cars.
The possibility of rotating the arm increases its versatility by allowing to pull from different angles.



AVAILABLE
IN GREY




Hydraulic stroke limiter.



Safety overload valve



Piston with automatic return.

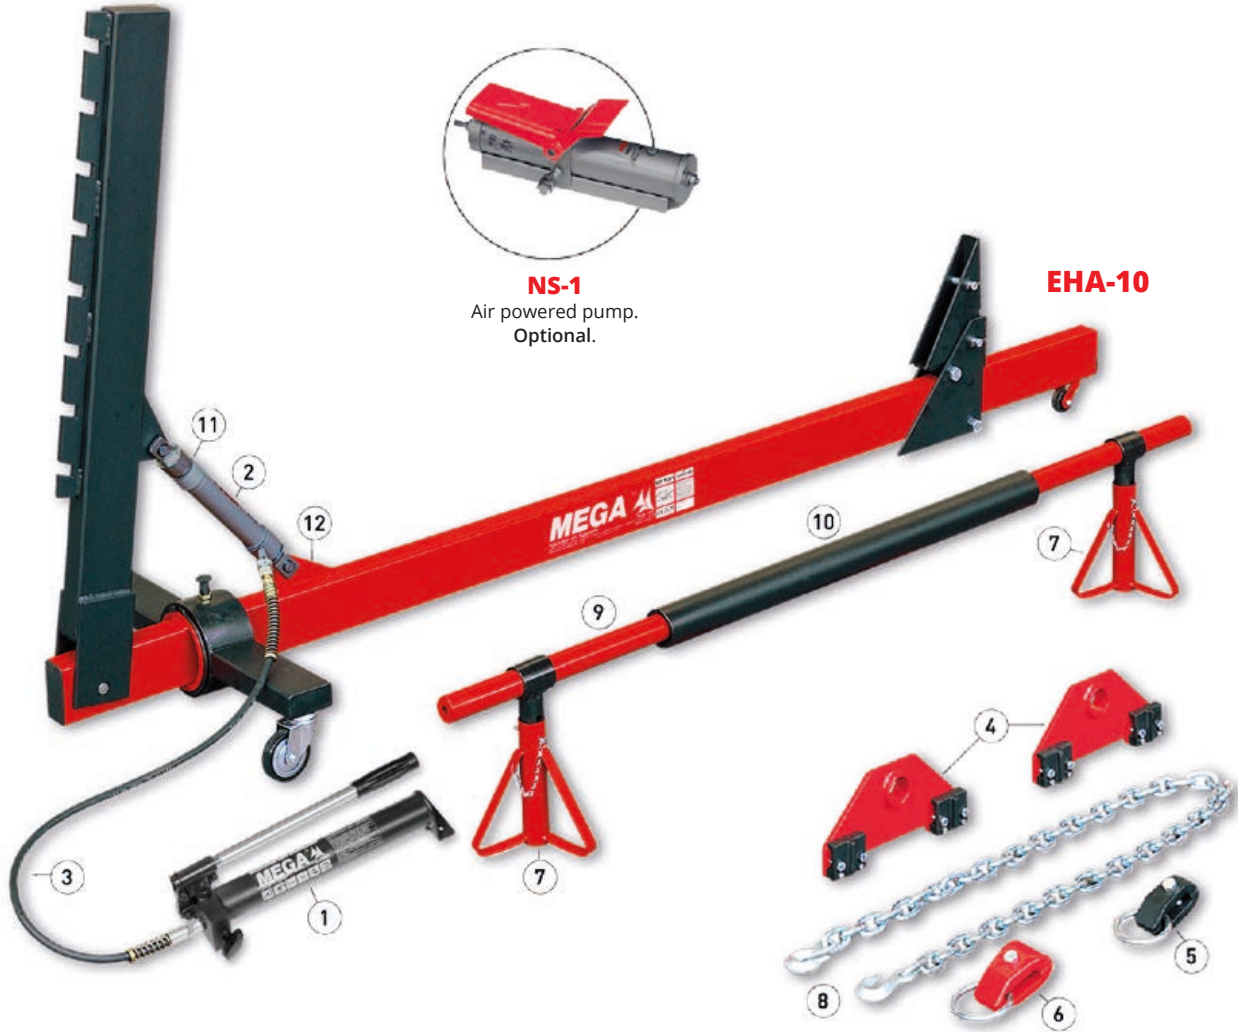


NS-1
Air powered pump.
Optional.

EHA-10

N°	Reference
1	BM-04
2	CC-10-B
3	A-5541
4	A-5096
5	A-5095
6	A-5094
7	S-21
8	A-5087
9	A-1512
10	A-1513
11	A-5088
12	A-5089
Capacity (kg)	10
Weight (kg)	178.5
Reference	EHA-10

As an option, it can be equipped with the NS-1 pneumatic pump, with foot pedal, which allows the operator to have his hands free.

IMPORTANT: The maximum working load of the chain is 1.4t.

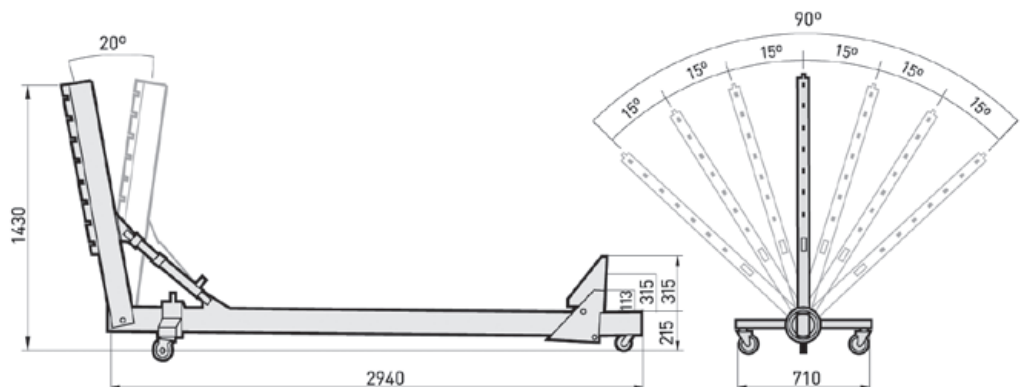



Hydraulic pipe benders DR

Bending work can be carried out without physical effort thanks to the high force of the hydraulic unit. Fitted with indelibly marked retractable bending frame to facilitate the positioning of the bending supports and pipe. New "V" shape frame design with 90° angle reference, which reduces the hydraulic stroke, and the bending time. For plumbing pipes, DIN 2440 and DIN 2441. They can make angles of up to 180°. They are supplied with a tripod and a swiveling telescopic lever. **DR2:** supplied in a plastic box. **DR3:** supplied in a wooden box.




Hydraulic stroke limiter.



Safety overload valve.



Piston with automatic return.



Swiveling telescopic handle.



The weight distribution allows easy and comfortable transport.

Capacity (t)	2"	3"
Weight (kg)	43	86.5
Reference	DR2	DR3



DR3

The following sets are supplied:
DR2: 1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2".
DR3: 1/2" - 3/4" - 1" - 1 1/4" - 1 1/2" - 2" - 2 1/2" - 3".

Axle stands C & S

Axle stands to secure loads as an essential safety measure. High stability and wide support feet to protect the workshop floor. Possibility to lock at different heights.



Pin attached to the base to prevent loss.



C6




C10



S15B

Refs.	Ch. (t)	H min.	H max.	Posit.	Weight (kg)
C6	6	360	520	5	6
C10	10	375	550	5	10.5
S15B	15	340	532	4	9.3

Measurements in mm.

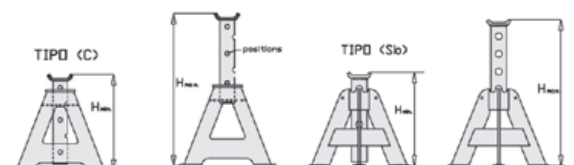

Jack exhibitor



This display facilitates the combined and functional presentation of the most popular bottle and trolley jacks completely removable.



A-5551L

Index of references

NO.	DESCRIPTION	Pages
A-5099	CLAMP	29
A-5204	EXTENDER	10
A-5205	EXTENDER	10
A-5206	EXTENDER	10
A-5211	EXTENDER	11
A-5212	EXTENDER	11
A-5270	REGULATION FILTER	10 - 28 - 29
A-5298	LOAD BALANCER	20
A-5551L	COMBINED EXHIBITOR	34
A-5600	SET OF PUNCHES	27
A-5601	SET OF PUNCHES	27
A-5609	LARGE BLACK TRAY	27
A-5612	PROTECTION PRESS PRD-PRP	27
A-5613	PROTECTION PRESS PRB-PRC	27
AB-300	DRUM LIFTING CLAMP	20
BR10	BOTTLE JACK 10T	14 - 16
BR12	BOTTLE JACK 12T	15
BR15	BOTTLE JACK 15T	15
BR2	BOTTLE JACK 2T	14
BR20	BOTTLE JACK 20T	15
BR25	BOTTLE JACK 25T	15
BR3	BOTTLE JACK 3T	14
BR30	BOTTLE JACK 30T	15
BR40	BOTTLE JACK 40T	15
BR5	BOTTLE JACK 5T	14
BR50	BOTTLE JACK 50T	15
BRB20	AIR HYDRAULIC BOTTLE JACK 20T	12
BRB30	AIR HYDRAULIC BOTTLE JACK 30T	12
BRS10	LOW PROFILE BOTTLE JACK 10T	16
BRS15	LOW PROFILE BOTTLE JACK 15T	16
BRS20	LOW PROFILE BOTTLE JACK 20T	16
BRS5	LOW PROFILE BOTTLE JACK 5T	16
BRT12	TELESCOPIC BOTTLE JACK 12T	16
BRT2	TELESCOPIC BOTTLE JACK 2T	16
BRT20	TELESCOPIC BOTTLE JACK 20T	16
BRT5	TELESCOPIC BOTTLE JACK 5T	16
C6	AXLE STAND 6 TNS	33
C10	AXLE STAND 10 TNS	33
CT-5	PULLING CYLINDER 5T	31
CT-10	PULLING CYLINDER 10T	31
CRM30	HYDRAULIC CRANE 3000KG	20
CRP10	HYDRAULIC CRANE P 1000KG	18 - 20
CRP20	HYDRAULIC CRANE P 2000KG	18 - 20
CRV10	HYDRAULIC CRANE V 1000KG	19 - 20
CRV20	HYDRAULIC CRANE V 2000KG	19 - 20
CRV6	HYDRAULIC CRANE V 650KG	19 - 20
DR2	PIPE BENDER 2"	33
DR3	PIPE BENDER 3"	33
EHA-10	BODY ALIGNING SET	32
GC-10	BODY REPAIR KIT 10T	31
GC-20	BODY REPAIR KIT 20T	31

NO.	DESCRIPTION	Pages
GCB-2	TRANSMISSION JACK	30
GT2	TROLLEY JACK 2T	7
GT4	TROLLEY JACK 4T	6 - 7
GT2S	TROLLEY JACK 2T SECURITY	7
GT2X	ULTRA-LOW PROFILE TROLLEY JACK	7
GT3	TROLLEY JACK 3T	6 - 7
K100	HYDRAULIC PRESS 100T	26
K100E	ELECTRIC HYDRAULIC PRESS 100T	26
MA-2	JACKING BEAM	28
MA-21	JACKING BEAM	28
ME-1500	LIFTING TABLE 1500KG	29
ME-2500	LIFTING TABLE 2500KG	29
ME-650	LIFTING TABLE 650KG	29
MGD-100	BOTTLE JACK 100T	15
MGL10	TOE JACK	16
N10-3	AIR HYDRAULIC JACK 10-20-35T	10 - 11
N15-2	AIR HYDRAULIC JACK 15-30T	10 - 11
N15-2B	AIR HYDRAULIC JACK 15-30T	10 - 11
N15-4	AIR HYDRAULIC JACK 15-30-50-80T	10 - 11
N20-3	AIR HYDRAULIC JACK 20-35-65T	10 - 11
N25	AIR HYDRAULIC JACK 25T	10 - 11
NP15-2B	AIR HYDRAULIC JACK PORTAB. 15-30T	12
NS-1	AIR PUMP 0.5L	32
PF350	TILTING PLATFORM	21
PRB20	WORKSHOP COLUMN PRESS 20T	22
PRB30	WORKSHOP COLUMN PRESS 30T	22
PRC20	COMPACT PRESS W. CYLINDER 20T	23
PRC20NF	COMPACT AIR HYDRA. PRESS 20T	23
PRC30	COMPACT PRESS W. CYLINDER 30T	23
PRC30NF	COMPACT AIR HYDRA. PRESS 30T	23
PRC50	COMPACT PRESS W. CYLINDER 50T	23
PRC50NF	COMPACT AIR HYDRA. PRESS 50T	23
PRD20	MOBILE CYL. PRESS 20T	24
PRD20NF	MOBILE CYL. AIR HYDR. PRESS 20T	24
PRD30	MOBILE CYL. PRESS 30T	24
PRD30NF	MOBILE CYL. AIR HYDR. PRESS 30T	24
PRD50	MOBILE CYL. PRESS 50T	24
PRD50NF	MOBILE CYL. AIR HYDRA. PRESS 50T	24
PRP30	AIR HYDR. PREMIUM PRESS 30T	25
PRP50	AIR HYDR. PREMIUM PRESS 50T	25
PRS15	DESKTOP PRESS 15T	27
PTM-2	PNEUMATIC PLATFORM. MOTORCYCLE	29
S15B	AXLE STAND S15B	33
SCR700	WHEEL DOLLY 700KG	30
T10	HEAVY DUTY TROLLEY JACK 10T	8
T12	HEAVY DUTY TROLLEY JACK 12T	8
T15	HEAVY DUTY TROLLEY JACK 15T	8
T20	HEAVY DUTY TROLLEY JACK 20T	8
T6	HEAVY DUTY TROLLEY JACK 6T	8
TRS1200	HIGH LIFT TRANSM. JACK 1200KG	21
TRS300	HIGH LIFT TRANSM. JACK 300KG	21
TRS750	HIGH LIFT TRANSM. 750KG	21

Notes



A series of 20 horizontal grey lines provided for taking notes.

Blank lined writing area consisting of 20 horizontal grey lines.



MEGA 

Melchor Gabilondo, S.A.

Polígono Industrial Eitua, 6
48240 BERRIZ (VIZCAYA) SPAIN
Tel.: + 34 94 622 50 90
Fax.: + 34 94 622 52 78 / export@mega.es

www.mega.es